


# MAHLE Powertrain Range Extender Demonstrator Vehicle

- > Lightweight range extender engine
- Powers vehicle when battery is depleted
- Developed to address EV range anxiety



## Range Extender Demonstrator Vehicle

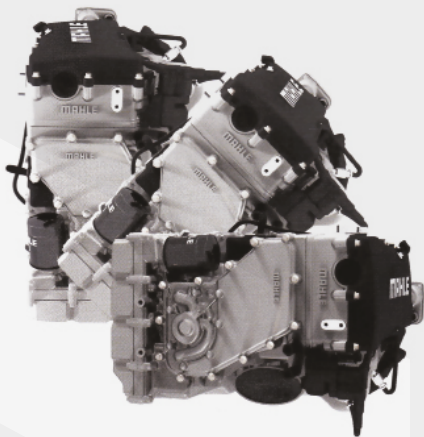

>> Flexible installation & orientation

As oil prices continue to rise and society becomes increasingly aware of the environment, the global automotive industry is now sharply focused on electric vehicles. However, the issue of 'range anxiety' has become a major concern for consumers and this negative factor, coupled with persistently high battery costs, has severely limited the market penetration of these new generation, zero emission vehicles. MAHLE Powertrain's solution to this dilemma is a compact Range Extender engine which can power the vehicle when the battery is depleted. A demonstrator vehicle has been built to showcase this technology and to assist in the further development and optimisation of the engine, associated hardware and control systems.

MAHLE Powertrain set ambitious performance targets for the demonstrator vehicle including a minimum 'electric only' range of 70 km. The maximum speed will be 145 km/h with the ability for continuous (charge sustaining) driving at 120 km/h. The vehicle will also be capable of maintaining 90 km/h on a 6 % gradient.

To reach all these targets, the engine was designed to produce 30 kW and the generator was specified to match this output. A battery pack rated at 14 kWh was required and a traction motor with 100 kW peak output was selected.

MAHLE Powertrain Ltd  
Costin House  
St James Mill Road  
Northampton  
NN5 5TZ  
Tel: +44 (0)1604 738 000

MAHLE Powertrain LLC  
14900 Galleon Court  
Plymouth  
Michigan 48170  
USA  
Tel: 001 734 738-52 01

MAHLE Powertrain GmbH  
Einsteinring 5  
85609 Aschheim  
Germany  
Tel: +49 89 96 29 15-0

MAHLE ZG Transmissions  
Georg-Kollmannsberger-Straße  
3 85386 Eching  
Germany  
Tel. +49 89 18 94 169-0


# MAHLE Powertrain

## Range Extender Demonstrator Vehicle

### Technical Specifications

Technical specifications	
Engine layout:	900 cc, 2 cylinder
Bore/stroke:	83.0 / 83.0 mm
Installation angle:	Vertical or horizontal
Engine control:	MAHLE Flexible ECU
Maximum power:	30 kW [4000 min-1 ]

Vehicle specifications	
CO <sub>2</sub> output NEDC:	< 45 g/km
Emissions target:	Euro 6
Pure Electric Range:	70 km
Combined Range:	500 km
Maximum Speed:	145 km/h
Kerb Weight:	1350 kg

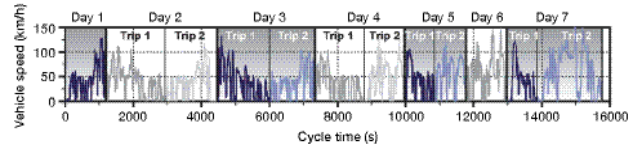

>> Vehicle drive cycle

### Benefits

- No mechanical link between the engine & wheels differentiates our concept from established hybrid cars
- Compact, lightweight engine with integrated generator
  - › Charges the battery as necessary which extends range of the vehicle
  - › Greater flexibility of use is available for longer journeys with it being refuelled with gasoline the traditional way
  - › Combined battery + engine range up to 500km before recharging / refuelling is required
- Bespoke battery management system for energy efficiency
- MAHLE Flexible ECU (MFE) implemented for both engine & vehicle control



>> Range extender engine in demonstrator vehicle

### Summary

The range extender demonstrator vehicle is fitted with a compact, lightweight range extender engine and is developed to address EV range anxiety. This hybrid allows for efficient energy usage and the potential for long distance driving, with the range extender engine running as required to sustain the battery charge, further extending the vehicle range.

MAHLE Powertrain Ltd  
13.210-877  
Jundiaí / São Paulo  
Brazil  
Tel. +55 11 4589-0400

MAHLE Automotive Technologies  
No. 1299 Huan Cheng Bei Road, Fengpu Industrial Park 201  
401 Shanghai, Fengxian District  
China  
Tel. +86 21 5136-0595

MAHLE product information 12/2021

[www.mahle-powertrain.com](http://www.mahle-powertrain.com)