
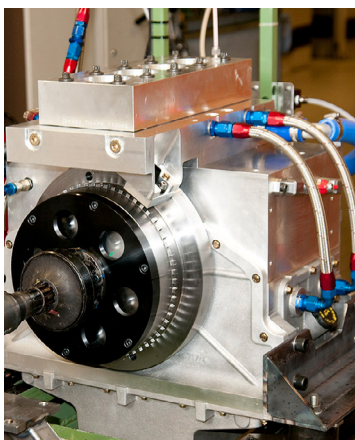


MAHLE Powertrain High Speed Single Cylinder


High Efficiency

Flexibility

Combustion System Validation

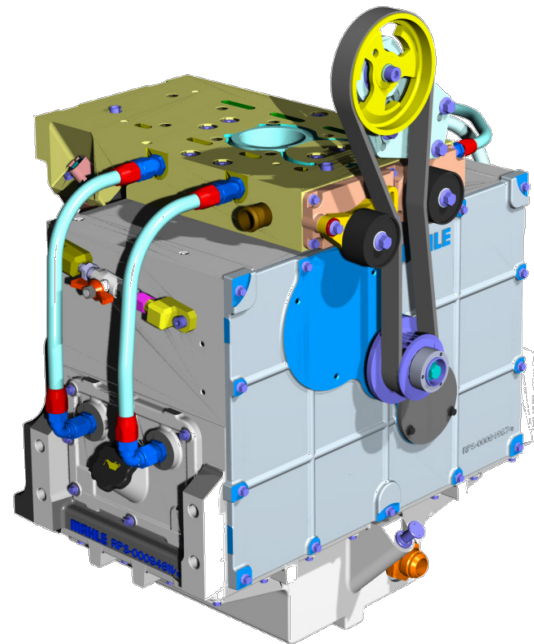

>> High speed bottom end

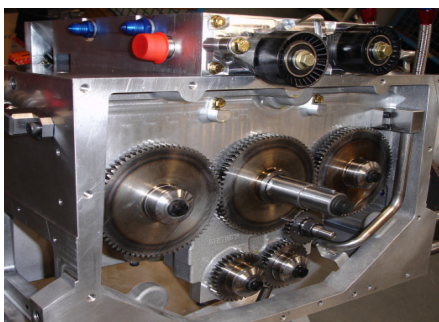

>> Fully balanced bottom end

High Speed Single Cylinder

Single cylinder research engines have previously been limited to comparatively low speed operation due to the inherent out-of-balance characteristics of this configuration. This has restricted the correlation of results and data with normal engines running at higher speeds.

MAHLE Powertrain has developed a proprietary, fully balanced, single cylinder bottom end to further enhance test capabilities. The modular design allows high speed operation at up to 5000 rpm for optical engines and up to 8500 rpm for thermodynamic engines. (The maximum operating speed can be pushed in excess of 13000 rpm in special motorsport applications.) This enables testing at representative engine speeds and also ensures enhanced accuracy of imaging and measurements during optical testing.

The high speed bottom-end can be configured for use with a wide range of engine types and has been successfully utilized for advanced combustion development with both spark ignition and compression ignition cylinder heads. The versatile design allows simple modification of liner / barrel position for comparison testing of different compression ratios.

Contact Us:
Powertrain@mahle.com

MAHLE Powertrain Ltd
Costin House, St James Mill Road
Northampton, NN5 5TZ, UK
Tel. +44 (0)1604 738 000

MAHLE ZG Transmissions
Georg-Kollmannsberger-Straße 3
85386 Eching, Germany
Tel. +49 89 18 94 169-0


MAHLE Powertrain LLC
14900 Galleon Court
Plymouth, MI 48170 USA
Tel. +1 734 738-52 01

www.mahle-powertrain.com

MAHLE Powertrain High Speed Single Cylinder

Capabilities

- Fully balanced for both first & second order vibrations
 - › 8,500 rpm for normal applications
 - › 5,000 rpm for optical applications
- Capability to run up to 13,000 rpm in special motorsport applications
- Capacity to run variety of cylinder heads & bore & stroke configurations:
 - › Bore: 65 – 100mm
 - › Stroke: 60 – 100mm
- Highly modular bottom end design for both thermodynamic & optical use
- Designed for ease of use:
 - › Quick compression ratio changes
 - › Quick piston changes (in optical mode)
 - › Quick head changes
- DI-3 multi cylinder head mounted on high speed bottom end
- Balance shaft flexibility with bolt-on masses

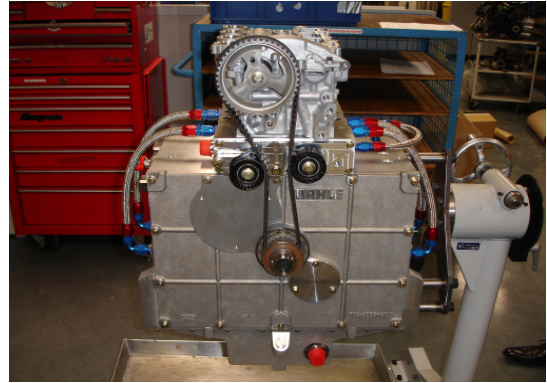


›› DI-3 multi cylinder head mounted on high speed bottom end

Performance

- In-cylinder pressures up to 200bar possible depending on bore size & conrod design
- Main bearings carried over for all configurations
- Operates safely up to max cylinder pressure of 200 bar
- Cylinder head, piston, con-rod & big end bearings nominated by customer
- Con-rod can be analysed to predict max cylinder pressure for safe operation

Fully Balanced Bottom End

- All major parts tailored to customer requirements
 - › Crankshaft
 - › Primary balance shafts x2
 - › Second order balance shafts x2
- Separate "bolt-on" masses for all shafts
- Balance system gear driven behind the front cover
- High speed deep groove ball bearings provide low and consistent friction for experimental control
- Idle gear easily accessed for second order balance shaft de-activation, if required, without the need for a full engine strip

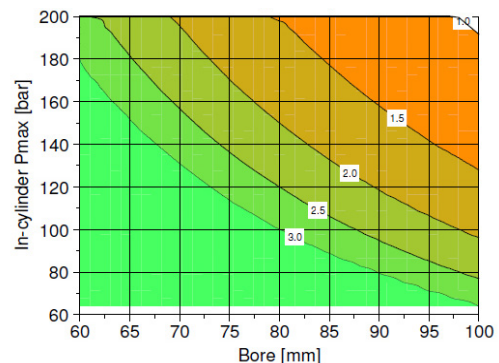

›› Main bearing safety factors

Contact Us:
Powertrain@mahle.com

MAHLE Powertrain Ltd. 2020

MAHLE Powertrain GmbH
Einsteinring 5
85609 Aschheim, Germany
Tel. +49 89 962915-0

MAHLE Powertrain Ltd
13.210-877
Jundiaí / São Paulo, Brazil
Tel. +55 11 4589-0400

MAHLE Automotive Technologies
No. 1299 Huan Cheng Bei Road, Fengpu Industrial Park
201 401 Shanghai, Fengxian District, China
Tel. +86 21 5136-0595