

### MAHLE Powertrain Through-the-Road Parallel Hybrid Demonstrator Vehicle



Three separate driving modes

4WD high performance mode

RWD zero emission EV mode



>> Protean in-wheel electric motors

#### Through-the-road Parallel Hybrid Demonstrator Vehicle

MAHLE Powertrain and Protean Electric have converted a standard gasoline powered C-segment car to a "through the road" parallel hybrid vehicle by applying in-wheel motors to the rear axle to work in combination with the standard front wheel drive configuration.

Plug-in hybrid electric vehicles (PHEVs) overcome many of the short-comings of EVs. Retaining a standard driveline, along with the EV driveline, enables the traction battery storage capacity to be reduced, though still maintaining an acceptable vehicle driving range. The aim of this project was to improve both the performance and the fuel economy of the vehicle through the addition of the hybrid system. The hybrid configuration adopted also provides the vehicle with all-wheel drive (AWD) capability.

The in-wheel motors, which also incorporate the disc brake and associated power electronics, provide an innovative solution to this challenge by utilising the available space within, and around, the wheels.

In addition to the packaging benefits, the in-wheel motors also bring advantages in the areas of performance and handling. In-wheel motors offer a large flat-torque response and the delivery of tractive effort is instant and seamless. This in turn sharpens up the feel of the vehicle by improving the response to driver torque demand.

Contact Us:  
Powertrain@mahle.com

MAHLE Powertrain Ltd  
Costin House, St James Mill Road  
Northampton, NN5 5TZ, UK  
Tel. +44 (0)1604 738 000

MAHLE ZG Transmissions  
Georg-Kollmannsberger-Straße 3  
85386 Eching, Germany  
Tel. +49 89 18 94 169-0

MAHLE Powertrain LLC  
14900 Galleon Court  
Plymouth, MI 48170 USA  
Tel. +1 734 738-52 01

[www.mahle-powertrain.com](http://www.mahle-powertrain.com)

### MAHLE Through-the-Road Parallel Hybrid Demonstrator Vehicle

#### Drive Systems

- 2 independent drive systems
- MAHLE Flexible ECU (MFE) used as main Vehicle Control Unit (VCU)
- MFE provides 4 key functions simultaneously:
  - › System control
  - › System safety
  - › Traction motor torque control
  - › Interface to the donor vehicle ECU (Includes CAN message modification)
- VCU has each subsystem set up as standalone model
- Increased model reusability

#### Vehicle specifications

CO <sub>2</sub> output NEDC:	< 40 g/km
Pure Electric Range:	> 50 km
Combined Range:	> 900 km
Maximum Speed:	190 km/h
Kerb Weight:	1,500 kg

#### Advantages


- High torque inwheel motors
- Reconfigurable controller architecture
- VCU interacts with multiple separate CAN buses simultaneously
- Provides ideal development platform for demonstrator & niche volume vehicle fleets



›› Parallel hybrid demonstrator vehicle

#### Performance Targets

- Vehicle performance targets achieved
  - › Benchmark 0-100km/h acceleration time reduced from 13.9 to <7.0 seconds
  - › Top speed increase by more than 10%
- NEDC fuel economy reduced from 6.4 to 1.7l/100km
- CO<sub>2</sub> emissions from 149 to <40g/km
- AWD capability enhances dynamic behaviour in high & low grip road conditions

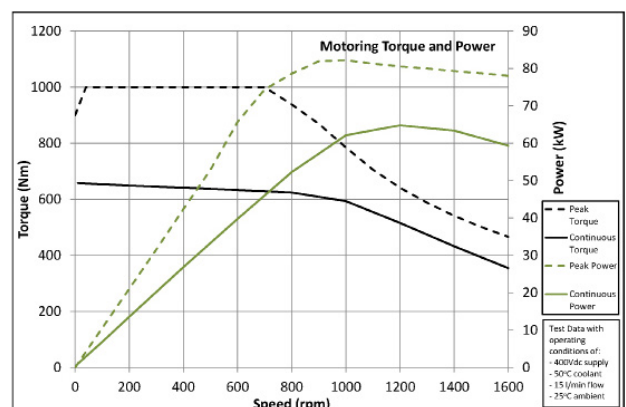

›› Motor Performance

Contact Us:  
Powertrain@mahle.com

MAHLE Powertrain GmbH  
Einsteinring 5  
85609 Aschheim, Germany  
Tel. +49 89 962915-0

MAHLE Powertrain Ltd  
13.210-877  
Jundiaí / São Paulo, Brazil  
Tel. +55 11 4589-0400

MAHLE Automotive Technologies  
No. 1299 Huan Cheng Bei Road, Fengpu Industrial Park  
201 401 Shanghai, Fengxian District, China  
Tel. +86 21 5136-0595